

Nitrogen Pressure Switch

FEATURES AND BENEFITS


- Typically Used for Clinical Nitrogen Systems
- NEMA® 4 Watertight Enclosure
- 10 - 250 PSI Range
- Normally Open or Normally Closed Contacts
- Instrument Quality Snap-action Switching Elements



SPECIFICATION

The pressure switch for nitrogen shall be Ohio Medical® Series. The pressure switch shall incorporate Underwriters Laboratories Inc.® listed single pole double throw snap-action switching elements. The switch shall be in a NEMA® 4 watertight housing and have an adjustable range of 11.0 to 250 PSIG and have approximate actuation value (differential) of 1.0 to 20.0 PSIG. The switch shall be oxygen cleaned, and have a continuous inductive rating of 10 amps 125 or 250 volts AC, 3 amps 480 volts AC. The switch may be wired “normally open” or “normally closed”. It has a 1/4” NPTF connection, and will be fitted with a quick connect to facilitate field service.



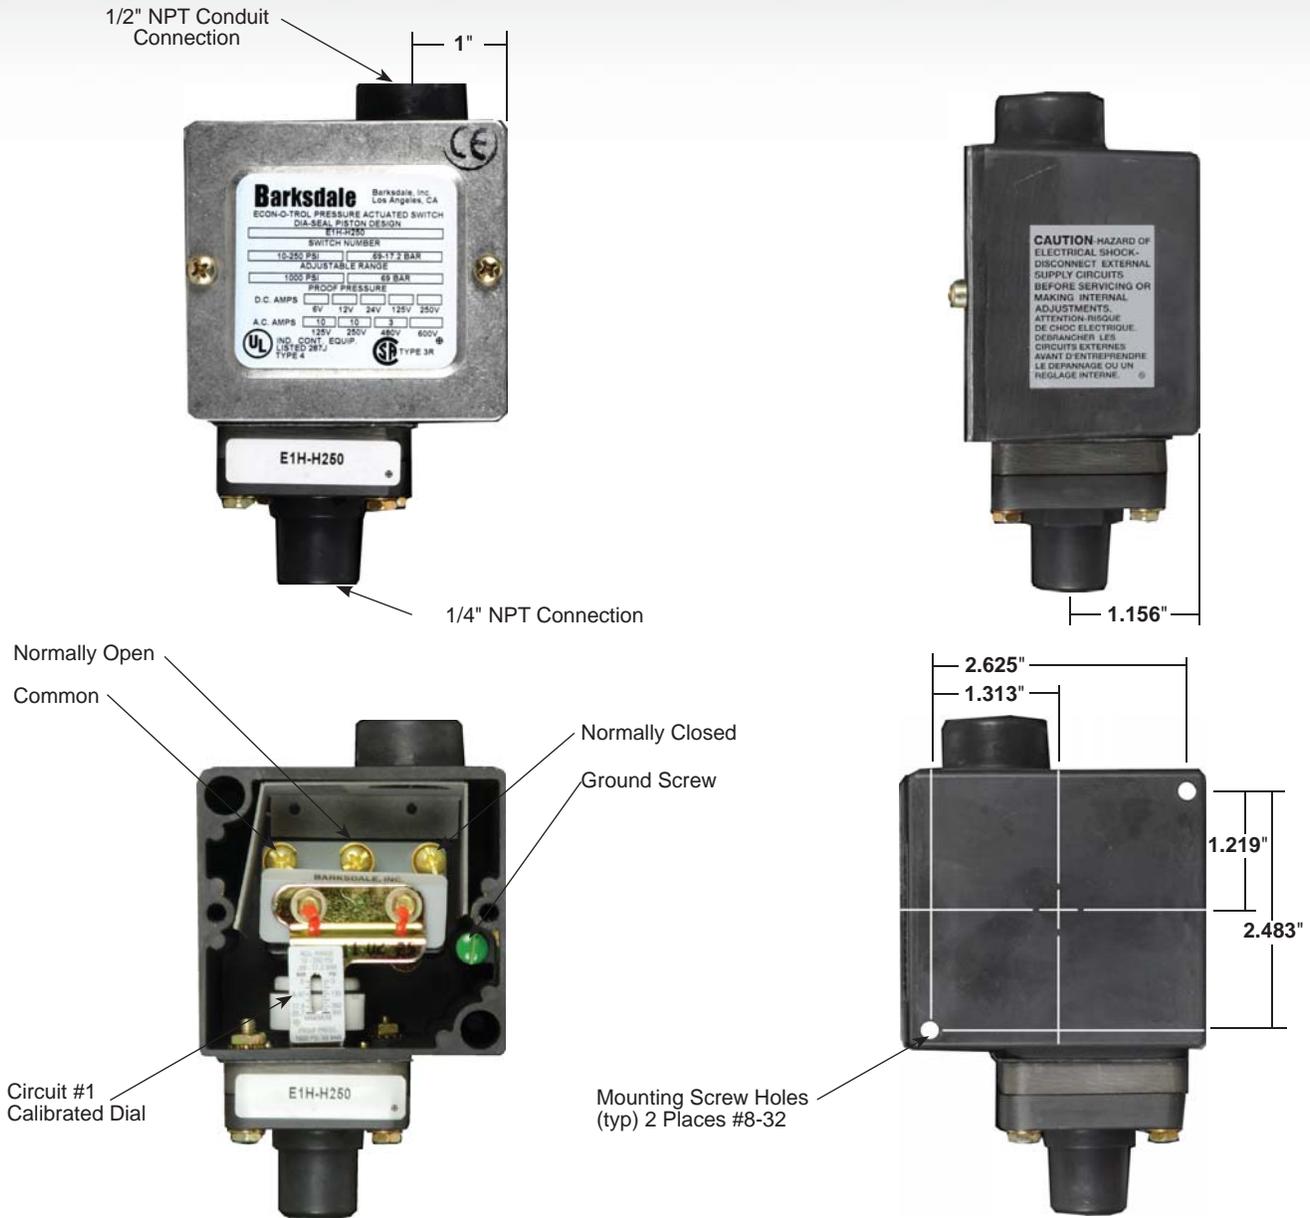

Part Number 261758 Nitrogen Pressure Switch

One Required for Mainline High Pressure
 One Required for Mainline Low Pressure

© 2016 Ohio Medical LLC. All Rights Reserved.

This document contains information that is proprietary and confidential to Ohio Medical LLC. Use of this information is under license from Ohio Medical LLC. Any use other than that authorized by Ohio Medical LLC is prohibited. Ohio Medical, and the Ohio Medical logo are registered trademarks of Ohio Medical LLC. Underwriters Laboratories, Inc., UL and the UL logo are registered trademarks of UL LLC Limited Liability Company. NEMA is a registered trademark of National Electrical Manufacturers Association. Barksdale is a registered trademark of Barksdale, Inc.



Ohio Medical®, 1111 Lakeside Drive, Gurnee, IL 60031
 Phone: 800-448-0700 / 847-855-0500 - Fax: 847-855-6300
 www.ohiomedical.com - www.ohiomedicalparts.com

255089 (Rev. 7) 09/2016