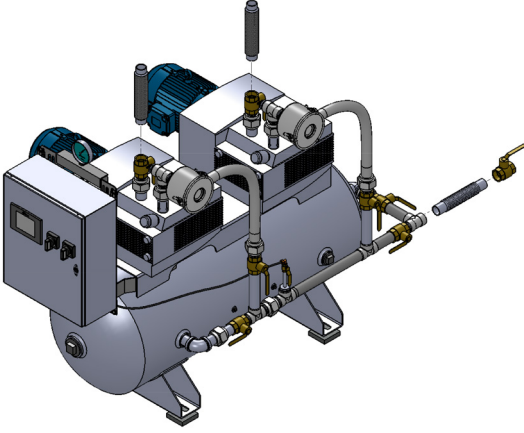


## D750B-T2 Dry Rotary Vane Vacuum System

	<b>Configuration</b>	Duplex Horizontal Tank Mount
	<b>System Capacity</b>	28.6 SCFM @ 19" Hg
	<b>Motor Horsepower (HP)</b>	7.5 HP
	<b>Total System Horsepower</b>	15 HP
	<b>Receiver Size</b>	120 Gallons
	<b>Available Voltage</b>	230/460 3 Phase contact factory for other voltages
	<b>Note: System capacity is stated with one pump in reserve.</b>	

### VACUUM PUMP MODULE

- Oil-Less, Air Cooled Rotary Vane Vacuum Pumps
- Each Pump Contains: Vacuum Filter, & Inlet Check Valve
- Pump Isolation Valves for Ease of Service

### AIR RECEIVER

- Constructed to ASME Standards
- Rated for Full Vacuum
- Equipped with 3 Valve Bypass
- Highly Visibility Vacuum Gauge
- Source Isolation Valve Included
- Includes: Mounting Pads & Flex Connectors

### SYSTEM CONTROLS

- Underwriters Laboratories Listed
- Nema 12 Enclosure
- Safety Disconnect Handles
- Fuseless Design
- HMI (Human Machine Interface) System
- NFPA Required Local Alarms

### OPTIONS

- Inlet Liquid Separators