

Amvex Medical Gas Flowmeters



Oxygen Flowmeter



Medical Air Flowmeter



CO2



NO2



Heliox

Specialty Flowmeters

The complete line of Amvex® Thorpe style Flowmeters range from Neonatal to Adult. All Flowmeters come with a standard 1/8" FNPT connection, but may be customized to fit your needs. They have impact resistant flow tubes and shrouds with solid brass bodies for durability. MR conditional options are also available. CE options are available for the Amvex Thorpe style Flowmeters. They are available in USA and ISO colors and meet all applicable regulatory requirements.

Product Specifications

Product Weight	159g (5.6oz)
Product Dimensions	139mm H x 28mm W x 139mm D (5.5" H x 1.1" W x 3.4" D)
Package Dimensions	203mm H x 114mm W x 76mm D (8" H x 4.5" W x 3" D)
Transport/Storage Temperatures	-40°C to 60°C (-40°F to 140°F)
Max Pressure	690kPa (100psig).

Specifications are subject to change without prior notice.

Features and Benefits

- Back pressure compensated so flow accuracy is not affected by restrictions
- Available in a range of flows from 200cc/min to 70 L/min
- Available in Oxygen, Medical Air, Heliox and CO2 and N2O
- Color coded inner tube and labeling
- White background for enhanced visibility
- No strip "D" shape knob
- Includes an inlet filter and inlet extension
- Available in 50, 60, and 72.5 psi source pressure
- Y-Block and Power-Take Off configurations available

Easy To Read



"D" Shape Knob

Chromed Brass Body




Product Specifications

Gas	Scale	Increments	Accuracy	Min. Flood/Flush
0.375 in	0-8 L/min	0.5 L/min (starts at 0.5 L/min)	+/- 0.5 L/min or +/- 10% of reading (whichever is greater)	50 L/min
Oxygen/Air	0-15 L/min	0.5 L/min from 1 to 5 L/min 1 L/min from 5 to 15 L/min	+/- 0.5 L/min or +/- 10% of reading (whichever is greater)	50 L/min
CO ₂ /N ₂ O	0-12 L/min	0.5 L/min from 1 to 6 L/min 1 L/min from 6 to 12 L/min	+/- 0.5 L/min or +/- 10% of reading (whichever is greater)	50 L/min
Heliox He/O ₂ (21% O ₂)	0-16 L/min	0.5 L/min from 1 to 6 L/min 1 L/min from 6 to 16 L/min	+/- 0.5 L/min or +/- 10% of reading (whichever is greater)	50 L/min
Oxygen/Air	0-70 L/min	5 L/min (starts at 10 L/min)	+/- 10% of reading	75 L/min
Pediatric O ₂ /CO ₂	0-200 cc/min	25 cc/min (starts at 25 cc/min)	+/- 20 cc/min	500 cc/min
Pediatric O ₂	0-1 L/min	0.1 L/min (starts at 0.1 L/min)	+/- 0.1 L/min	2.5 L/min
Pediatric O ₂	0-3.5 L/min	0.125 L/min from 0.125 to 1 L/min 0.25 L/min from 1 to 3.5 L/min	+/- 0.125 L/min or +/- 10% of reading (whichever is greater)	45 L/min

Flowmeters are calibrated at the pressure indicated on the Flow Tube, 21° C (70° F), at standard atmospheric pressure.

Product Configurator

FM-SS(S)TU-VV(WW)-(X)

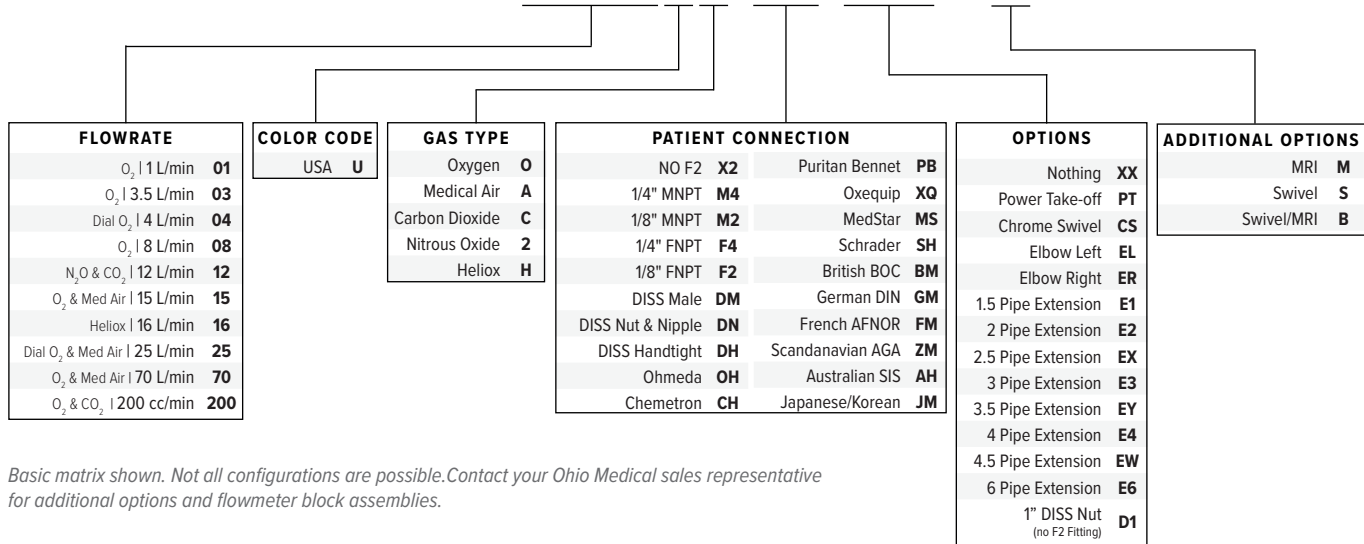

Basic matrix shown. Not all configurations are possible. Contact your Ohio Medical sales representative for additional options and flowmeter block assemblies.

© 2017 Ohio Medical LLC. This document contains information that is proprietary and confidential to Ohio Medical LLC. Use of this information is under license from Ohio Medical. Any use other than that authorized by Ohio Medical LLC is prohibited. Ohio Medical, the Ohio Medical logo, Amvex, and the Amvex logo are registered trademarks of Ohio Medical LLC. Chemetron, Med Star and Oxequip are registered trademarks of Allied Healthcare Products, Inc. Ohmeda is a registered trademark of GE Healthcare Finland Oy Corporation. Puritan Bennett is a registered trademark of Covidien LP. Schrader is a registered trademark of Schrader-Bridgeport International, Inc.

